




ANATOMY OF A BULB:

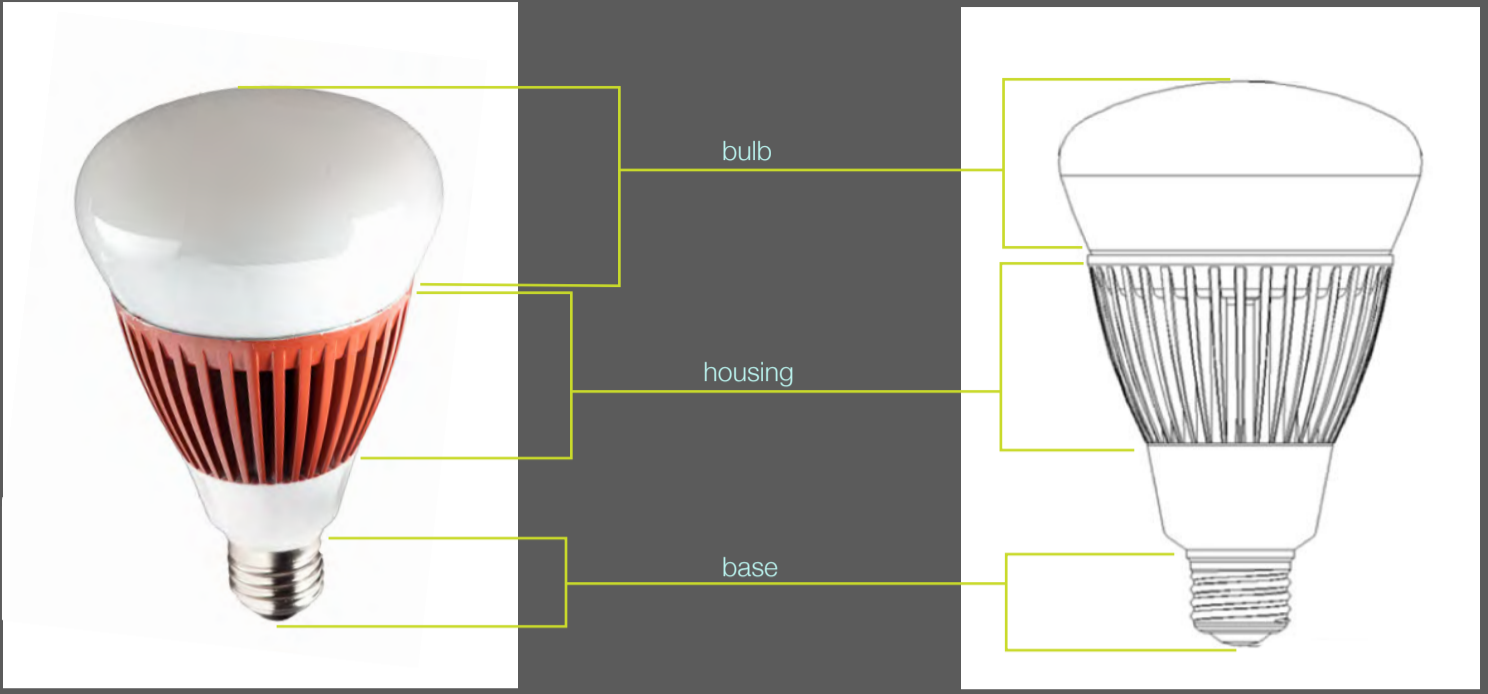

BULB SHAPES:

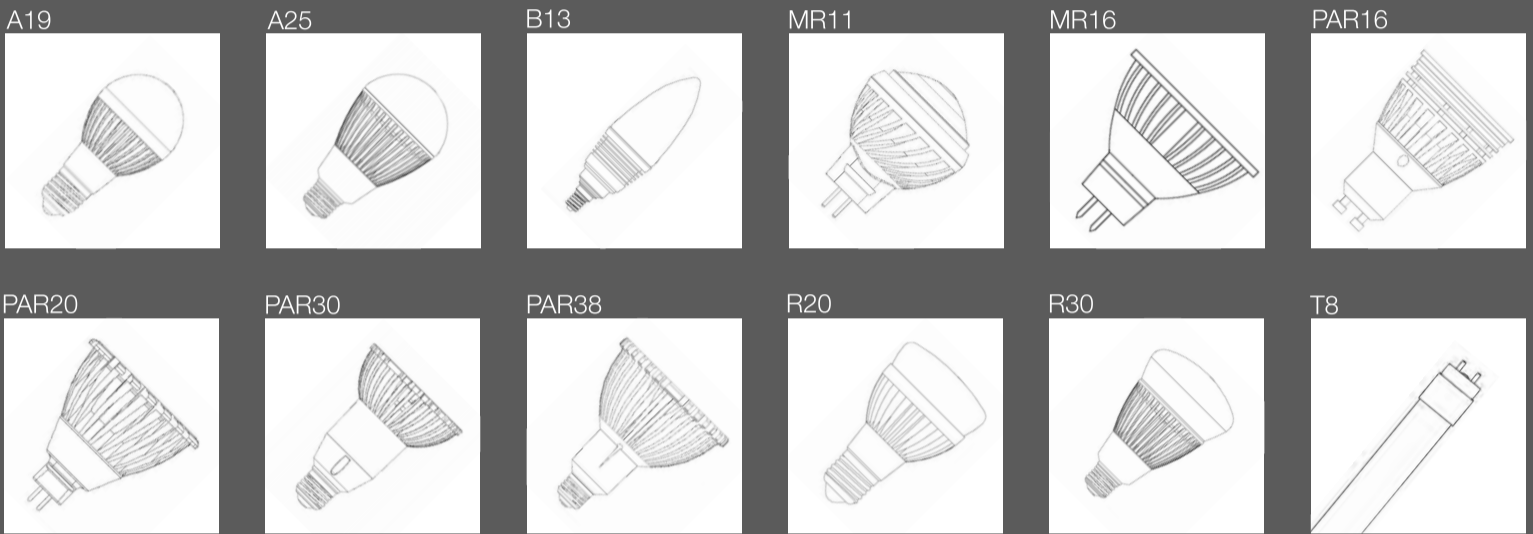

BASE OPTIONS:

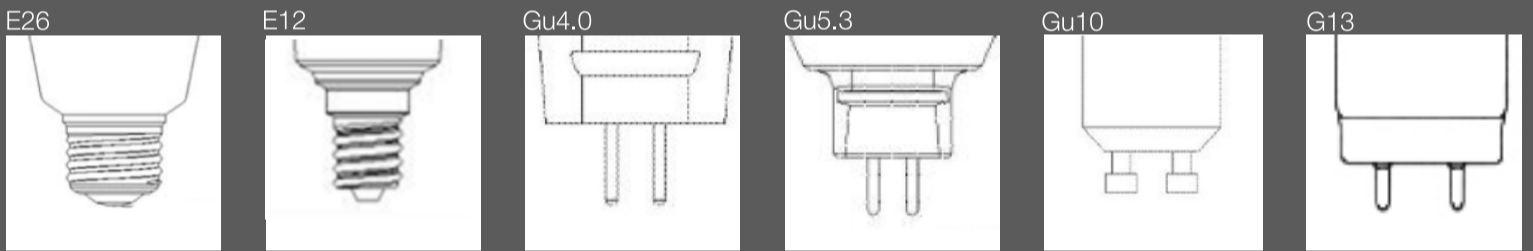

Common screw-in household base.    Candelabra screw-in base.    Has 2 pins that are 4.0 mm apart.    Has 2 pins that are 5.3 mm apart.    Has 2 pins that are 10 mm apart.    Has 2 pins that are 13 mm apart.

BEAM ANGLES:



TYPE:

Standard: Not dimmable. On/Off.    Dimmable: Dims with compatible dimmers.

COLOR TEMPERATURE:

30 (3000 K): Warm, white golden glow. Most like current incandescents. Best for home use.    45 (4500 K): Natural white. Provides clean light for all applications.    60 (6000 K): Cool white. Most similar to direct sunlight. Provides enhanced contrast ideal for work environments.

VOLTAGE:

85 - 140 VAC Standard in most households in US.    210 - 265 VAC Common in Europe and industrial installations in the US.    265 - 320 VAC Covers 277 VAC for US industrial applications.    12 VDC Common in track lighting.

HOUSING COLOR:

